

### Radio communicator

<b>Patent number:</b>	CN1499725
<b>Publication date:</b>	2004-05-26
<b>Inventor:</b>	HIDEICHI TAKEDA (JP); MASAO MIYaura (JP)
<b>Applicant:</b>	ALPS ELECTRIC CO LTD (JP)
<b>Classification:</b>	
<b>- international:</b>	H03L7/00
<b>- european:</b>	
<b>Application number:</b>	CN200310115656 20031110
<b>Priority number(s):</b>	JP20020324670 20021108

**Also published as:**

 JP2004159207 (,

**Report a data error here**


Abstract not available for CN1499725

Abstract of corresponding document: **JP2004159207**

**<P>PROBLEM TO BE SOLVED:** To prevent an oscillation frequency of a voltage controlled oscillation circuit from being varied even if it is switched from a blind time slot to a transmitting time slot.

<P>**SOLUTION:** The device comprises a transmitting circuit 5 for transmitting at a predetermined transmitting slot, and a voltage controlled oscillation circuit 2 for conducting direct FM modulation for an oscillation signal with modulated data while its oscillation frequency is controlled by a PLL circuit 3. As for the transmitting circuit 5 during the transmitting slot, a power supply voltage is stopped it during a blind time slot period when the voltage controlled oscillation circuit 2 is locked by the PLL circuit 3, and the power supply voltage is supplied during a transmitting time slot period, following the blind time slot, when the voltage controlled oscillation circuit 2 is lock-released by the PLL circuit 3. In addition, a DC level of modulated data in the transmitting time slot period is set higher or lower than the one in the blind time slot.

<P>COPYRIGHT: (C)2004,JPO

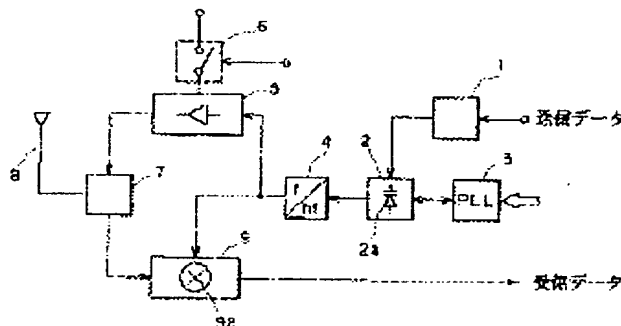

Data supplied from the **esp@cenet** database - Worldwide